


External Dimensions (mm)

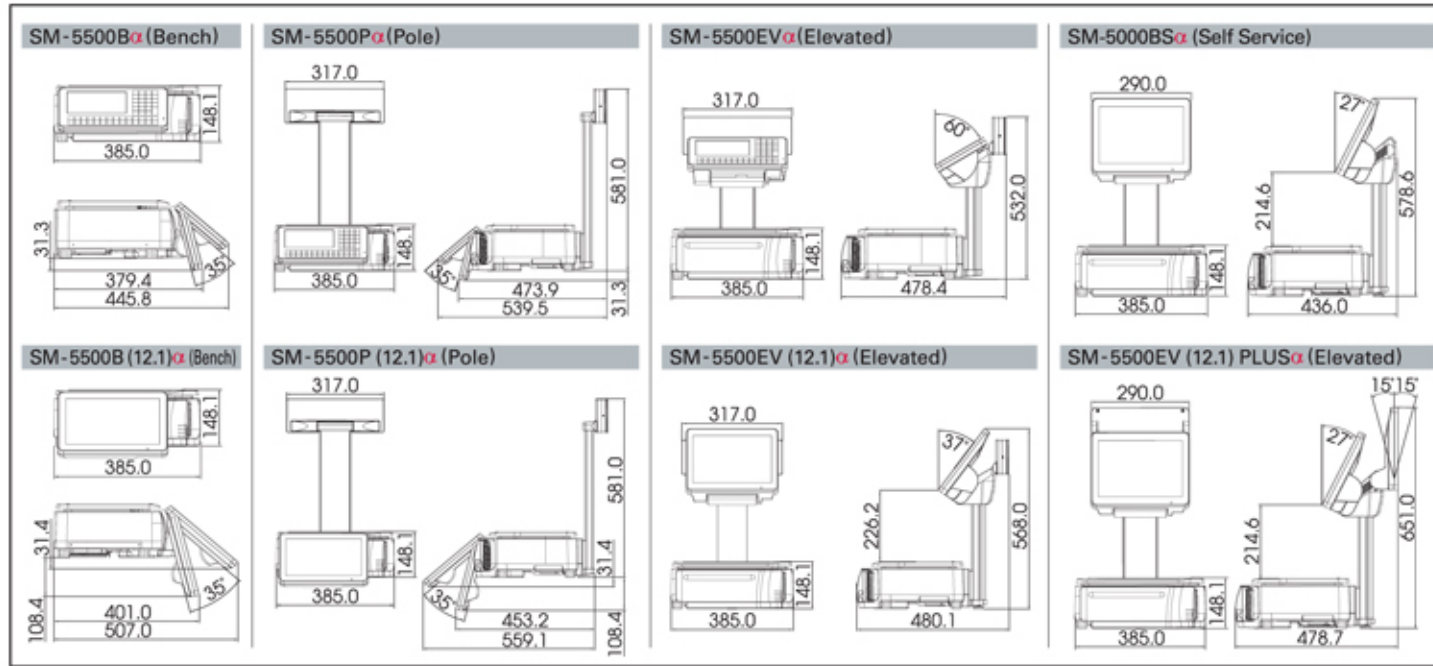

Specifications

Capacity	Max 6kg	Max 15kg / 30lb	Max 30kg
Single Interval	e = 2g	e = 5g / 0.01lb	e = 10g
Multi Interval	e = 1g	e = 2g	e = 5g
Capacity	Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model	SM-5500Bα	SM-5500Pα	SM-5500EVα	SM-5500EVα (with 2nd printer)	SM-5000BSα	SM-5500B(12.1)α	SM-5500P(12.1)α	SM-5500EV(12.1)α	SM-5500EV(12.1)α (with 2nd printer)	SM-5500EV (12.1) PLUSα
Dimension / W x D x H (mm)	385 x 446 x 147	385 x 531 x 581	385 x 468 x 465	385 x 483 x 515	385 x 436 x 579	385 x 507 x 148	385 x 559 x 581	385 x 480 x 568	385 x 491 x 552	385 x 479 x 651
Operator Display	○	○	○	○	—	—	—	—	—	—
Customer Display	○	○	○	○	○	○	○	○	○	○
Display Resolution	1/3,000, 1/6,000 & 1/7,500									
Number of Preset Keys	28 Preset Keys / 23 Alphanumeric Function Keys (For 7" Operator WVGA with Touch)									
CPU	Dual Core 1.2GHz									
Memory	SD Card 8GB & Above									
Label Size / W x H (mm)	80mm x 240mm (Max)									
Label/Receipt Roll Diameter	125mm (Max)									
Label/Receipt/2nd Receipt Paper Width	80mm									
Printing Speed	Up to 150mm / Second*									
Power Source	AC 100 / 110 or 220 / 230 / 240 Volts (50 / 60 Hz) Factory Default									
Operating Temperature	-10°C to +40°C									
Humidity	15% to 85% RH									
Standard Interface	RS232C, Ethernet 10 / 100 Base T, USB 2.0 Host, Cash Drawer									
Net Weight	12.0kg	14.3kg	16.5kg	18.0kg	16.4kg	13.8kg	16.6kg	18.8kg	20.3kg	18.8kg
Options	Wireless LAN (IEEE 802.11b/g), Built-in Scanner, Built-in Card Reader, 2nd Receipt Printer, Linerless Receipt Printer, Built-in Speaker									
Other / Variants	SM-5500Hα, SM-5000BS, SM-5500 Console									



* To achieve maximum print speed, high sensitivity thermal paper is necessary. Contact DIGI for details.



CE • Specifications are subject to change without prior notice
• Meet or exceed OIML Class III requirements



SM-5500α

PC Based System Scale Printer

Breaking New Grounds With Salient Features



SM-5500EV(12.1)α

TERAOKA WEIGH-SYSTEM PTE LTD.

4 Leng Kee Road #05-02/03/04/05/11
SIS Building SINGAPORE 159088
TEL : +65 6472 2996
SALES: +65 6378 5387
FAX : +65 6863 4614
URL : www.teraoka.com.sg
E-MAIL : bdd@teraoka.com.sg

TERAOKA SEIKO CO., LTD.

13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580, JAPAN
TEL : +81-3-3752-2131
FAX : +81-3-3752-2801
URL : www.digisystem.com
E-MAIL : info@hq.digi.co.jp

SM5500α / B / 0813

Searching for
a New Balance

Sophisticated Design And Features For A Touch Of Elegance At Your Store



e.LABEL Hi-Touch Ensures Fast And Easy PLU Retrieval

e.LABEL comes with built in hi-touch sensor.

When tapped, PLU is wirelessly sent to SM-5000 PC scales.

e.LABEL
85 x 74 x 15 mm

Increase Sales at Point of Purchase

Additional information such as nutrition, origin, useful tips and recommended recipes can automatically be prompted to counter staff at the point of purchase to up sell or cross sell whenever the opportunity arises.



QR Code Scanning

InfoCard and InfoTag Ensure Accurate Pricing and Product Information

Database updates at the server are automatically sent to the InfoCard and InfoTag, ensuring that pricing is in sync with the checkouts at all times.



InfoCard
226 x 170 x 18 mm

Display accurate prices with attractive bitmap image and scannable barcode.



InfoTag 2"
65 x 39 x 12 mm

InfoTag 2.7"
78 x 51 x 14 mm

Built-In Scanner

Workspace is minimized as the SM-5500^α comes with optional scanner that is ergonomically built in the scale.



Multi-Media Possibilities

Up sell or cross sell with the multi-media functionality by simply interfacing with 12.1" Customer Display.



Remote Display



12.1" Customer Display

Higher Sales Turnover with Integrated Queue and Collection Management

SM-5500^α integrated queue and collection management provides customers with the convenience to continue shopping while waiting for their turn to be called, effectively reducing walk-aways and increasing sales.

- Queue / Collection Number
- Average Waiting Time
- Number of Customers Ahead

Your ticket number is

08

Printed: 30.01.13 (WED) 11.10
Estimated waiting time: 00:10
Customers in waiting: 5

Please Wait
for your number to be called



Remote Display

TVP-1500QV2



THIS WEEK SPECIAL
\$ 8.99 /KG

**Roasted Chicken
Lemon-Herb Sauce**

Ingredients:
Chicken, Salt, Mustard, Distilled Vinegar, Lemon Juice, Peppercorns,
Natural Smoke Flavour, Water, Tomatoes, Honey, Lime Juice,
Red Pepper, Turmeric, Onion Powder, Spices And Colouring,
Natural Flavour, Corn Starch
To Reheat:
Remove From Container.
Place In A Pre-heated Oven For 30 - 35 Minutes.
Microwave
Remove Plastic Lid. Heat On High 6 - 8 Minutes.

Fast Printing Improves Operation Speed

The label and receipt printers are built for high speed printing at up to 150mm / sec. *, improving throughput at the serving counter.

On Demand Printing

Product related information such as recipes or coupons can readily be printed on demand from the optional TVP-1500Q printer and the built-in optional receipt printer.

Linerless Printing Improves Productivity and Reduce Downtime

Without the release liner, the number of labels per roll will be increased significantly. This translates to fewer roll changes as well as a reduction in label changing downtime. Label wastage is minimised when label length becomes flexible, saving money and environmentally friendly.



Linerless Labeling

More Features....

ECR functions, remote diagnostics and help mode for operators.

* Check with your DIGI distributor for details